
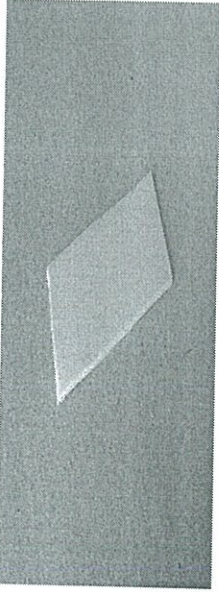

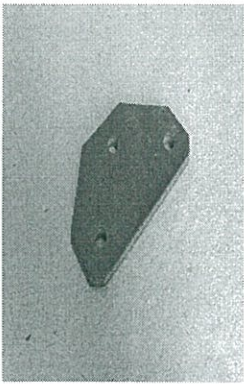


**Tanlov hujjatlarining texnik qismining 1-ilovasi**

Mahsulot raqami	Mahsulot nomi	Mahsulot rasmi	Qo'shimcha ma'lumot
96914169	COVER FLOOR HARNESS		<p><b>Material:</b> Penaporiten (20 kg/m<sup>3</sup>)                      Mustahkamlik chegarasi – 0,8 kg/m<sup>3</sup>                      Cho'zilishi– 160% мин                      Mustahkamlik chegarasi – 0,61 кг/см мин                      Color: Kulrang                      Test Specifications:                      - Butlovchi qism EDS-T-7602 ga muvofiq MVSS 302 testiga javob berishi kerak.                      - Ikki tomonlama yopishqoq lenta:                      Akril yopishtiruvci;                      Dastlabki bog'lanish – 0,8 kgs/25mm                      Yakuniy bog'lanish – 0,9 kgs/25mm,                      Ximoya qog'ozi – silicon bilan ishlov beriladi (130 +/- 7mkm)</p>
96914445	INSULATION STRIP		<p><b>Material:</b> Penapolietilen                      Color: Och-Ko'k                      Zichlik: 0.028 г/см<sup>3</sup> (EDS-T-7673)                      Cho'zilish: (EDS-T-7669-S1)                      -uzunligi bo'yicha: -110%                      -kengligi bo'yicha: -118%                      Mustahkamlik chegarasi: (EDS-T-7669-S1)                      Uzunligi bo'yicha: -2.7кг/см<sup>2</sup>                      Kengligi bo'yicha: -2.3кг/см<sup>2</sup>                      Adezyon kuchi:                      T/S 200±10 мм/мин, -30°C x 8ч.-                      +80°Cx8ч.:мин12H 25mm                      - (EDS-T-7609 ширина испытываемого листа 25 mm)</p>

96914698	PAD INSIDE HANDLE		<p><b>Материал:</b> Penapoliureten  <b>Color:</b> Kulrang</p> <p><b>tolorences:</b></p> <p><b>kenglik bo'yicha:</b> ± 1,0 мм  <b>Qalinlik bo'yicha:</b> ± 0,3 мм</p> <p><b>Zichlik:</b> 0.021 г/см<sup>3</sup>  <b>Cho'zilish:</b> 160% мин.</p> <p><b>-mustahkamlik chegarasi</b> – 0,61 кг/см мин.  <b>-mustahkamlik chegarasi</b> – 0,8 кг/см<sup>2</sup></p> <p><b>-kenglik boyicha:</b> -118%</p> <p><b>4. Ikki tomonlama yopishqoq lenta:</b></p> <p>- akril yopishtiruvchi; dastlabki boglanish - 0,8 кг с/25 мм  - oxirgi boglanish - 0,9 кг с/25 мм</p> <p>Ximoya qogozı – silicon bilan ishlov berilgan (130 + 7 мкм)</p> <p><b>Test Specifications:</b></p> <p>- Butlovchi qism EDS-T-7602 ga muvofiq MVSS 302 testiga javob berishi kerak</p>
96915424	CUSHION FUEL BUMP		<p><b>Материал:</b> Penapoliureten  <b>Color:</b> qora  <b>Толщина:</b> 5±1 мм</p> <p><b>Ikki tomonlama yopishqoq lenta:</b>  Akril yopishtiruvchi; boshlangich yopishtiruvchi – 0,8 кгс/25мм  Oxirgi yopishtiruvchi – 0,9 кгс/25мм</p>

Marketing va ta'minot bo'yicha agent:

*M. Jorjonov*

J.Mirzayev